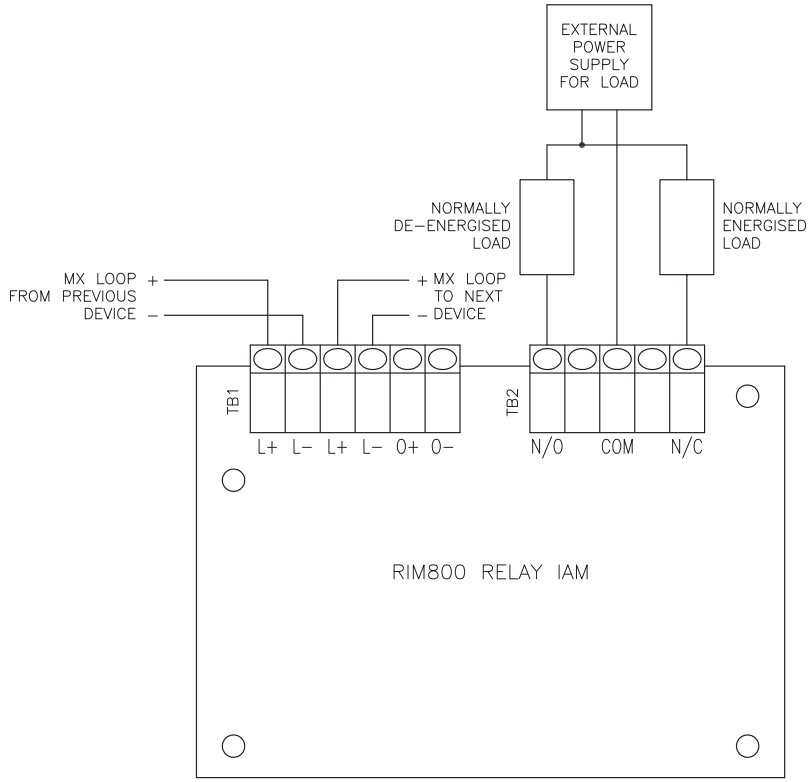


NOTES:
1. RELAY IS SINGLE POLE CHANGEOVER, UNSUPERVISED, VOLTAGE–FREE OUTPUT.
2. CONTACT RATING: 2A @ 30V DC (RESISTIVE).
3. LEAVE O+ AND O– TERMINALS UNCONNECTED

CONFIDENTIAL: THIS DOCUMENT MUST NOT BE COPIED NOR THE CONTENTS PASSED ON TO ANY THIRD PARTY WITHOUT THE CONSENT OF THE COMPANY.

UNLESS OTHERWISE STATED: ALL DIMENSIONS IN MILLIMETRES. DO NOT SCALE. TOLERANCES ARE TO BE: 1 DECIMAL PLACE ±0.5, 2 DECIMAL PLACES ±0.3, 3 DECIMAL PLACES ±0.1

3rd ANGLE PROJECTION

ISS/REV	AMENDMENTS	ECO	DRN	CHKD	AUTH	APVD	DATE
A	ORIGINAL FROM 1982–71–112.	4809	KJS	LSC	RC	DK	12–11–15
B	PART NUMBERS CHANGED TO USE MX PART NUMBERS.	4936	KJS	MH	RC	DP	11–7–16

tyco
Fire Protection Products
TYCO FIRE PROTECTION PRODUCTS
17 MARY MULLER DRIVE
P.O. BOX 19545
CHRISTCHURCH, PH: +64 3 3895096
NEW ZEALAND. FAX:+64 3 3895938

4100ESi
RIM800 MX RELAY IAM
WIRING DIAGRAM

DRAWING No: 1976-181 SHEET 423 of N

A3 | ISS/REV B | PART No: